

Proudly
Manufactured
in WA

TUBECOLOR[®] fencing system

DIY INSTALLATION GUIDE



onesteel

TUBECOLOR[®]
fencing
3year
warranty

The warranty logo includes three icons at the bottom: a house, a bird, and a dog, representing residential, pet, and livestock applications.

DIY INSTALLATION GUIDE

The Location




The first thing you should do is check the location of underground services (gas, water, telephone and electricity) so you won't run into difficulties when you're installing your new fence.

You should also check with your local planning authority to make sure your new fence will meet regulations.

The Tools

These are the basic tools you'll need to get you going. Some careful planning, a little elbow grease and you're away:

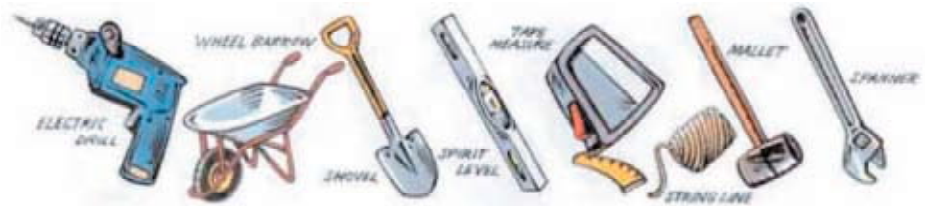

The Materials

We will supply you with all the fence components and fixtures you will need, but you should also have some other basic materials on hand:




INSTALLING THE FENCE

1. Measure and Dig


Once you have decided where the fence will go, mark out the position of the gate. This will tell you where to dig the post holes. They should be approximately 600mm deep and 200mm across.

TRADE TIPS

- It's easier if you work from the high ground, down the slope.
- Use a spacer (or panel) to show you where to dig the post holes.

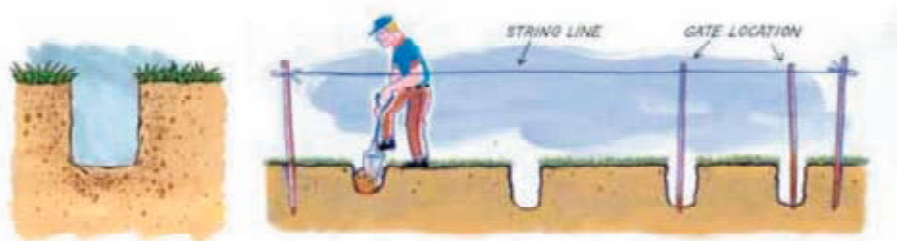

2. Posts and Panels

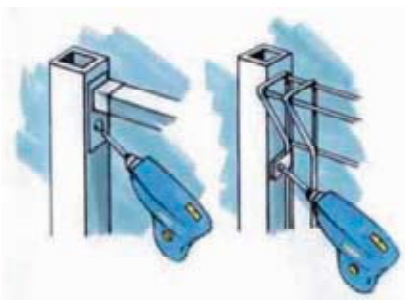


First, lay the panels and posts out along the fence line. Work outwards from the gate post and be careful to keep approximately 75mm ground clearance under the panels. Tek screw the panel with the fittings to the post.

For wire-based fencing use U-Clips.

Alternatively, when installing tubular fencing use the L-Clips supplied or use rail bracket fittings for the top and bottom rails.


TRADE TIPS:

- Prop panels with timber props to keep the fence in position while you work.
- Use packers under the panels to support the posts and panels and give the necessary ground clearance.
- Be sure to check line and level as you go.
- Drive the tek screws firmly and lock them fully home when the posts are set into their footings.
- On sloping ground you will need to evenly step the panels. Make sure you work out the steps before fastening the panels to the posts.
- For tubular fencing, it is best to install the posts first and let the concrete set. Panels can then be installed the following day.

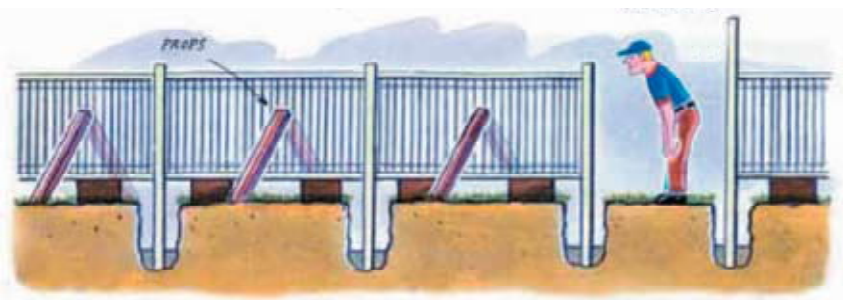

INSTALLING THE FENCE

3. Mix and Pour

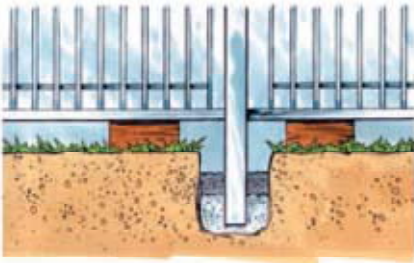

Secure the posts into position by filling the hole with wet concrete mix to a depth of 600mm. Then tighten all the tek screws firmly, checking line and level as you go.

TRADE TIPS:

- If you prefer to have top soil at the base of the post, fill the holes with wet concrete to a depth of 550mm or 50mm below the surface of the ground. Ensure you compact the soil well. Alternatively, fill the hole with wet concrete mix to a depth of 600mm.
- Clean excess concrete from posts and panels with a soft wet rag.
- Make sure you don't disturb the fence for at least 24 hours after the concrete has been poured.

4. Topping off the Job




Once the concrete has set and the fence posts are firm, attach the post caps with a soft mallet. Remove all props and unwanted materials, then backfill around the posts with garden top soil.

TRADE TIPS:

- You'll extend the life of your new fence if you wash off the grit and grime regularly. This is particularly important if your fence is near water or exposed to salt air.
- If the protective surface coat gets chipped or damaged, clean the affected area, prime the surface and apply two coats of touch-up paint.

INSTALLING A GARDEN GATE

1. Getting Started

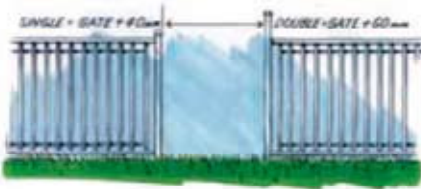


The first thing you should do is determine which way you want the gate to open. For boundary fences, the gate should open in towards the property.

2. Hinge Set Up




Insert the hinge bush into the gate frame, then set the spacers into position so they can support the gate and provide ground clearance. Next, slide the hinge brackets into the hinge bushes and mark the locating hold position onto the gate post. Now remove the gate and drill holes to match the bolt provided. Finally, locate the hinge brackets into position.

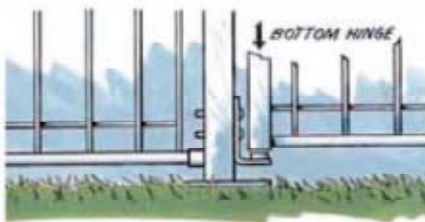

TRADE TIPS:

- Make sure you keep the top of the gate frame level with the top of the adjoining fence panels.
- The vertical wires of the gate should face the outside of the fence.
- Fix the top hinge firmly but leave the bottom hinge loose until the gate is installed.
- The hinge with the fixed pin should be used at the top of the post and slotted into the one at the bottom.
- Alternatively, you may prefer to use butt hinges instead of hinge bushes and brackets.

3. Gate Set Up

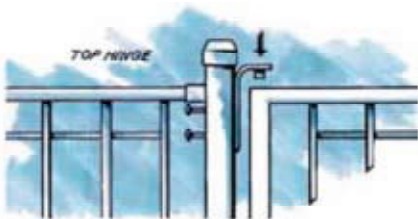


Slide the gate onto the lower hinge and drop the top hinge into the gate frame. Now tighten the bolts and check the gate opening action.

TRADE TIPS:

- Make sure the gate opens fully on sloping ground.
- Adjust horizontal movement of the bottom pin to make the gap even between the gate and the post on the closing side of the gate.

4. Gate Catch Set Up

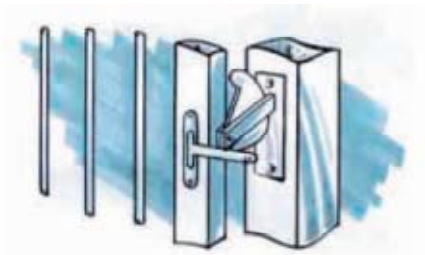

Firstly, position the 'D' latch on the post with tek screws so it will be aligned with the striker bar when the gate is closed. Then fix the striker bar to the vertical gate frame and check for smooth operation.

TRADE TIPS:

- Set 'D' latch height to match your personal requirements.
- Don't fully tighten the tek screws on the striker until the gate operates smoothly.
- If you have both the single and double gate, the bent striker is for the single gate and the straight striker is for the double gate.

INSTALLING A POOL GATE

1. Safety Pool Gates


Self-closing Tubecolor® Fencing System safety gates are designed specifically for pool fences.

2. Which Way?

Regulations require that pool gates be installed to open away from the pool, so that young children will push the gate shut rather than open when trying to gain access.



3. Positioning the Gate

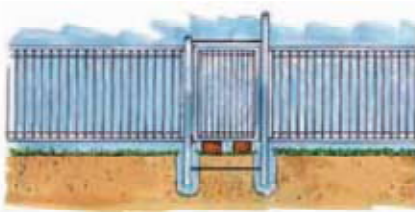

Dig holes for the posts and a trench for the bottom locating rail. To maintain spacing, you may also wish to use a top locating rail. Position the gate unit to match the above ground reference heights. Then prop and check the line and level.

TRADE TIPS:

- It's easier to install the gate at the same time as the fence panels.
- Leave the bottom locating rail on to maintain post spacing, particularly in expansive soils that may move over time.

4. Setting the Gate




Re-check the line and level of the posts and pour wet concrete mix into the post holes to finish.

TRADE TIPS:

- You will use less concrete if you backfill the bottom rail trench with soil.
- If you prefer to have top soil at the base of the post, fill the holes with wet concrete mix to a depth of 550mm or 50mm below the surface of the ground. Ensure you compact the soil well. Alternatively, fill the hole completely with wet concrete mix to a depth of 600mm.

5. Cleaning Up

24 hours after you have poured the concrete you are ready to remove the top locating rail and/or protective packaging. Check the instructions on the gate for spring adjustments and maintenance instructions.

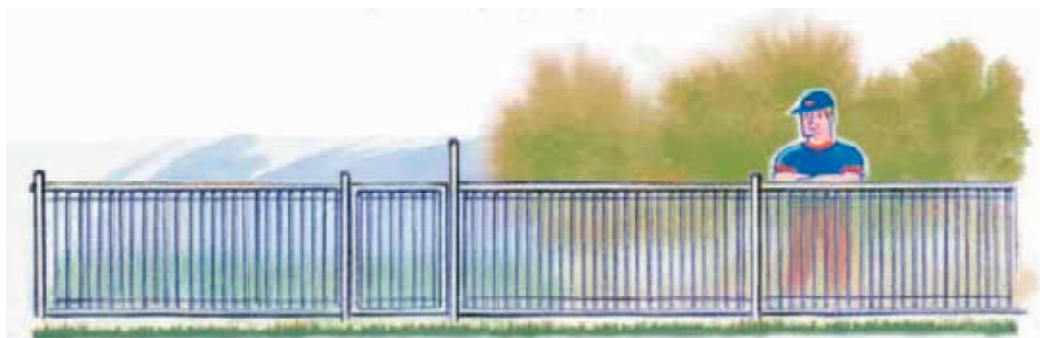

TUBECOLOR[®]

fencing system

CONTACTS

OneSteel Direct

If you would like to register your warranty and/or make a warranty claim, please contact:

OneSteel Direct

Freecall: 1800 178 335
Freefax: 1800 101 141
Email: onesteeldirect@onesteel.com

Postal Address: Locked Bag 8825
WOLLONGONG DC NSW 2500
AUSTRALIA

Distributors

The Tubecolor[®] Fencing System is proudly distributed by:

Midalia Steel

Please refer to the White Pages Business and Government Directories or alternatively, please access the Distributor menu at www.tubecolor.com for contact details.

Manufacturing Facility

The Tubecolor[®] Fencing System is produced at:

OneSteel Manufacturing Facility

Phone: 1300 766 482
Fax: 08 9473 1006

Postal Address: PO BOX 129
KWINANA WA 6167
AUSTRALIA

This publication has been prepared by OneSteel (OneSteel Trading Pty Limited ABN 50 007 519 646). Please note that the specifications and technical data are subject to change without notice and to ensure accuracy users of this publication are requested to check the information to satisfy themselves and not to rely on the information without first doing so. Unless required by law, the company cannot accept any responsibility for any loss, damage or consequence resulting from the use of this publication. Photographs shown are representative only of typical applications, current at November 2008. This brochure is not an offer to trade and shall not form any part of the trading terms in any transaction. © Copyright 2008 OneSteel Trading Pty Limited. Tubecolor[®] is a registered trade mark of OneSteel Trading Pty Limited ABN 50 007 519 646. Issue 1 November 2008; LH0130